REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

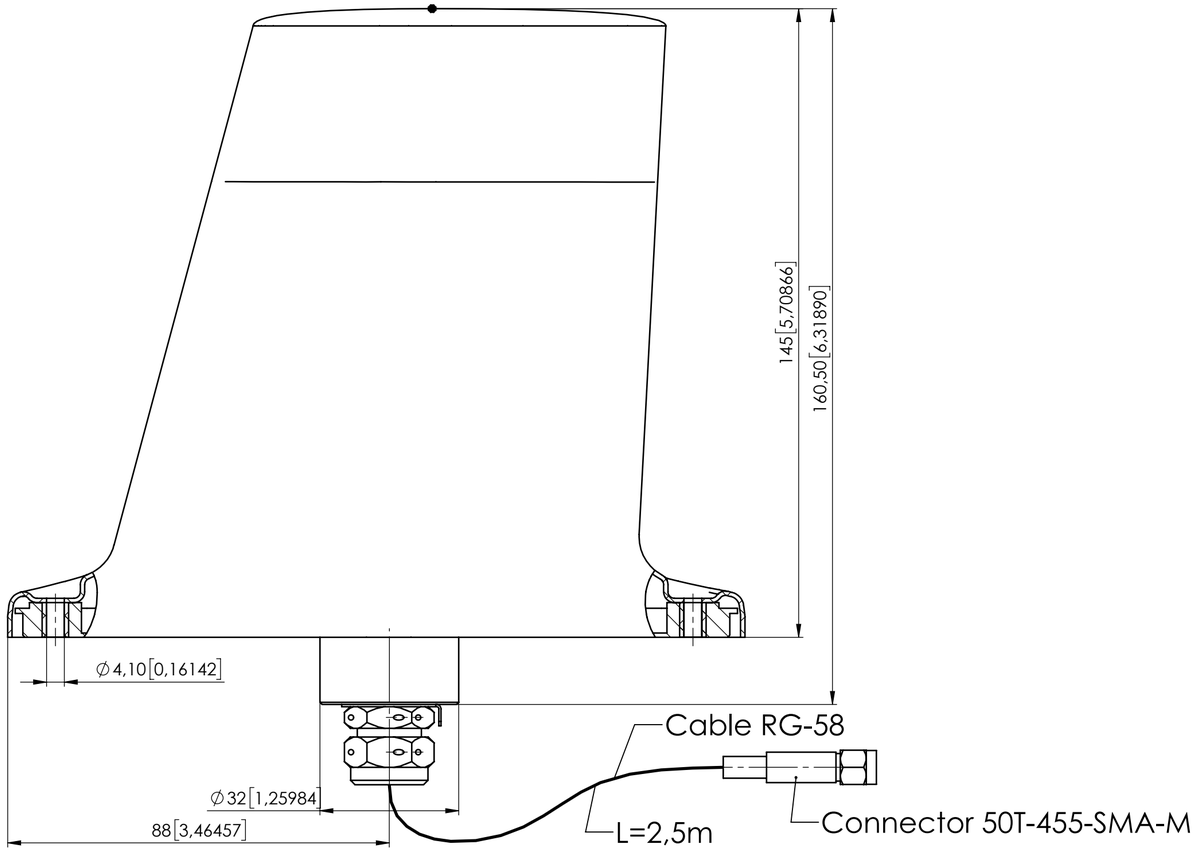

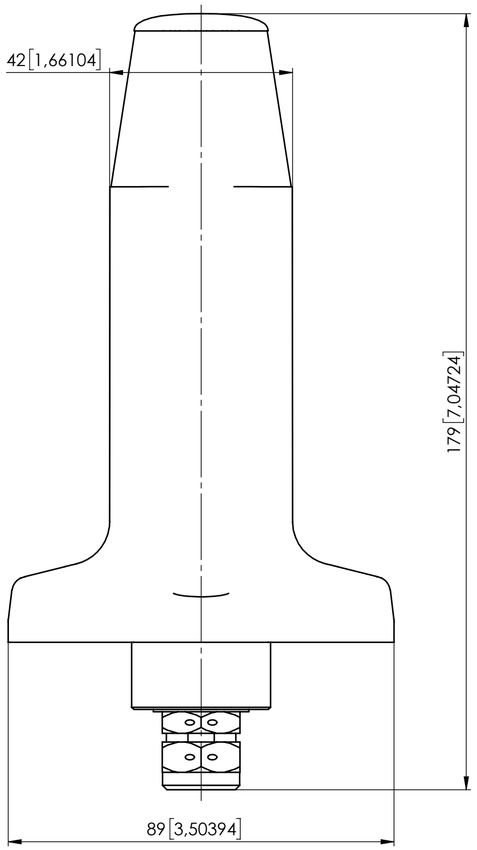

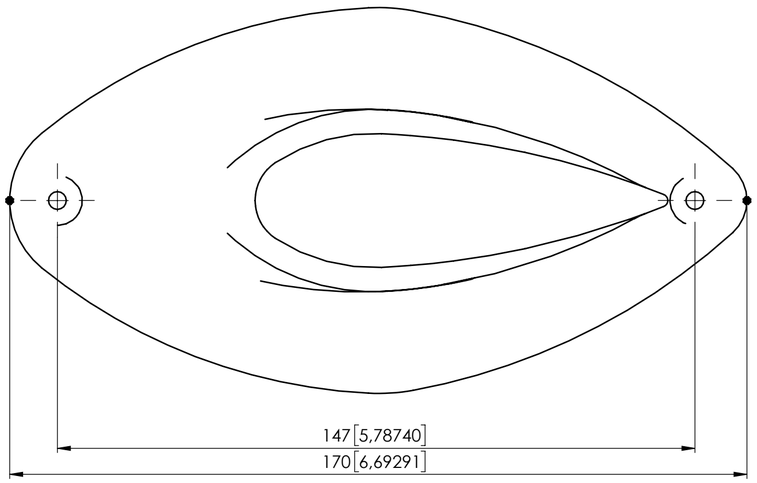

Technical information:
1. Protection rating: IP67;
2. Operating temperature: from -40 to +60°C;
3. Input impedance: 50 Om;
4. Standing wave ratio: 1.4;
5. Coefficient amplification: 10±1 dB;
6. Operating frequency band: 880...970 MHz;
7. Antenna pattern - horizontal circular;

This drawing and any information or descriptive material set out on it are the confidential and copyright property of **UAVOS ©** and MUST NOT BE DISCLOSED, COPIED, LOANED in whole or part or used for any purpose without the written permission of **UAVOS.**

NEXT ASSY | USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED
DIM ARE IN MILLIMETERS
[DIM ARE IN INCHES]
TOL ON ANGLES ±**0.5**°
0 PLACE ±**0.5** 1 PLACE ±**0.1**
INTERPRET DIM AND TOL
PER **ASME Y14.5M**
Surface Finish: **Ra3.2**

THIRD ANGLE PROJECTION

DRAFTER		
CHECKER		
DEV ENGR		

CONTRACT NO.
UAVOS FUNDED

MATERIAL

UAVOS

TITLE
Onboard antenna

SIZE	CAGE CODE	DRAWING NUMBER	REV
A2		UV01.431329.100.315	10

SCALE 1:1 | WEIGHT KG 0.45 | SHEET 1 OF 1