





REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

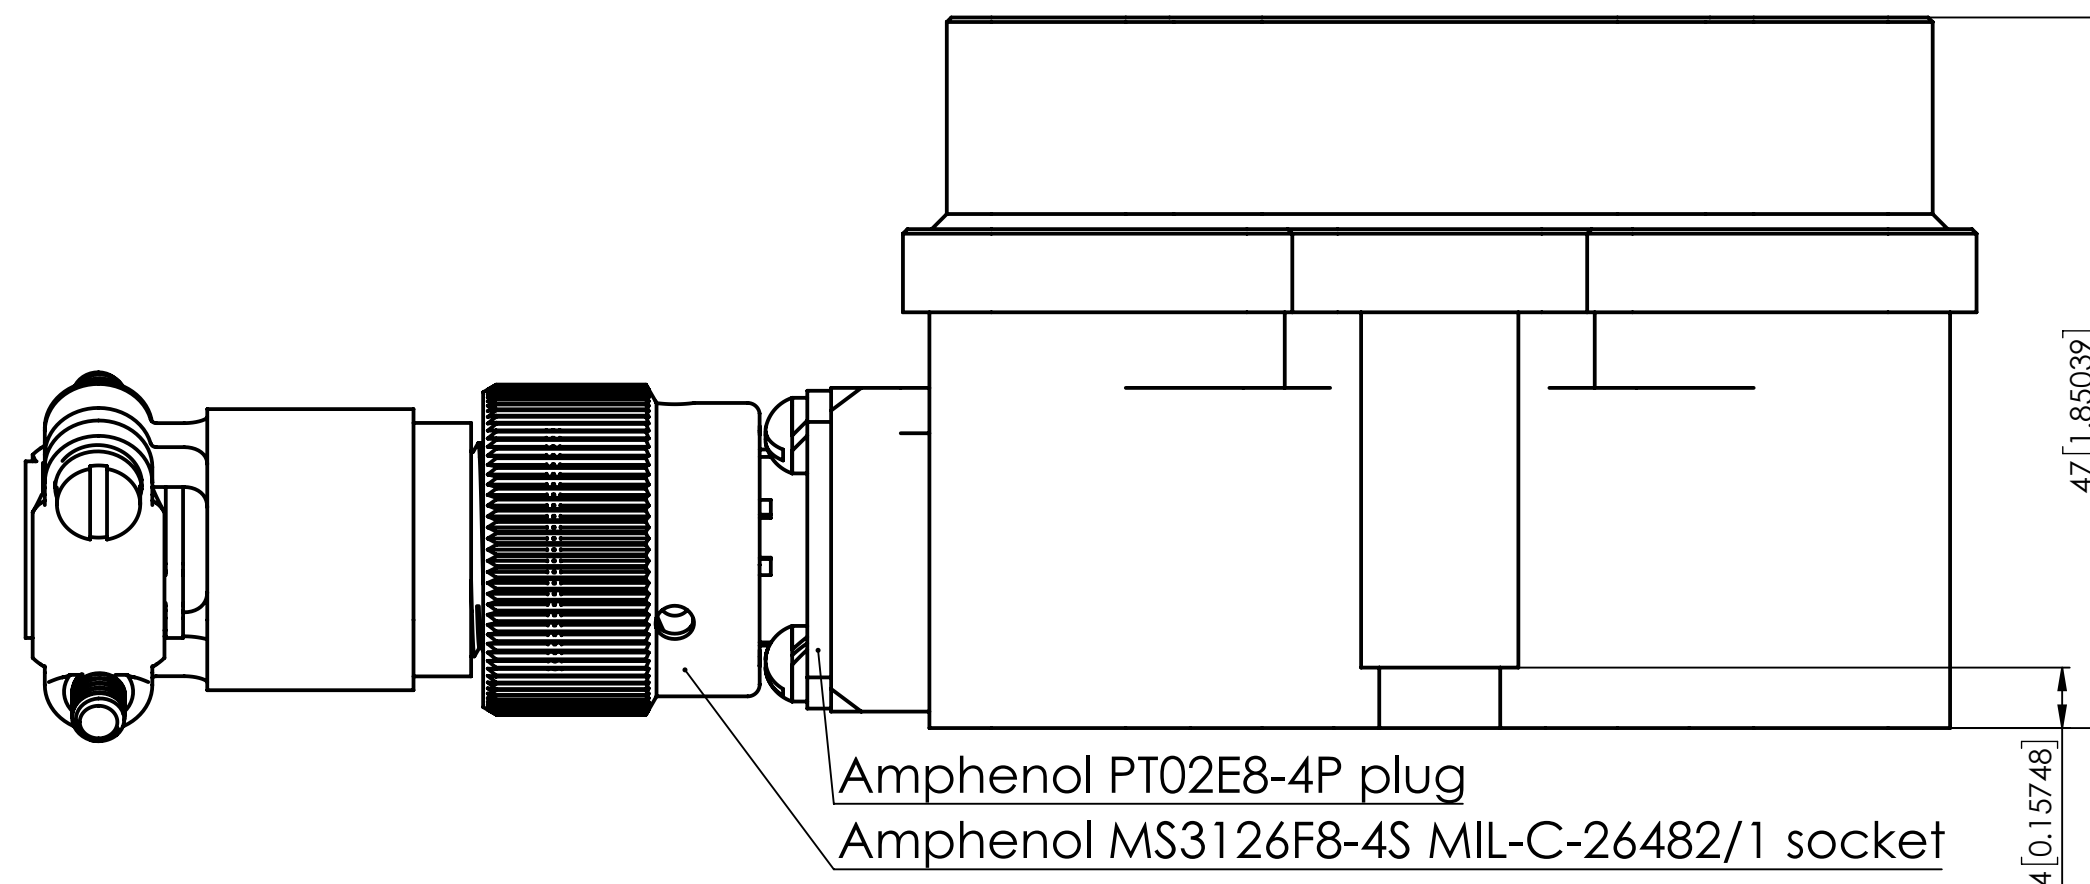

Amphenol PT02E8-4P plug

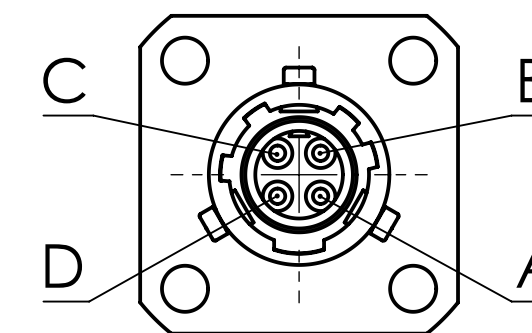

C	B
CAN_H	V+
D	A
CAN_L	GND

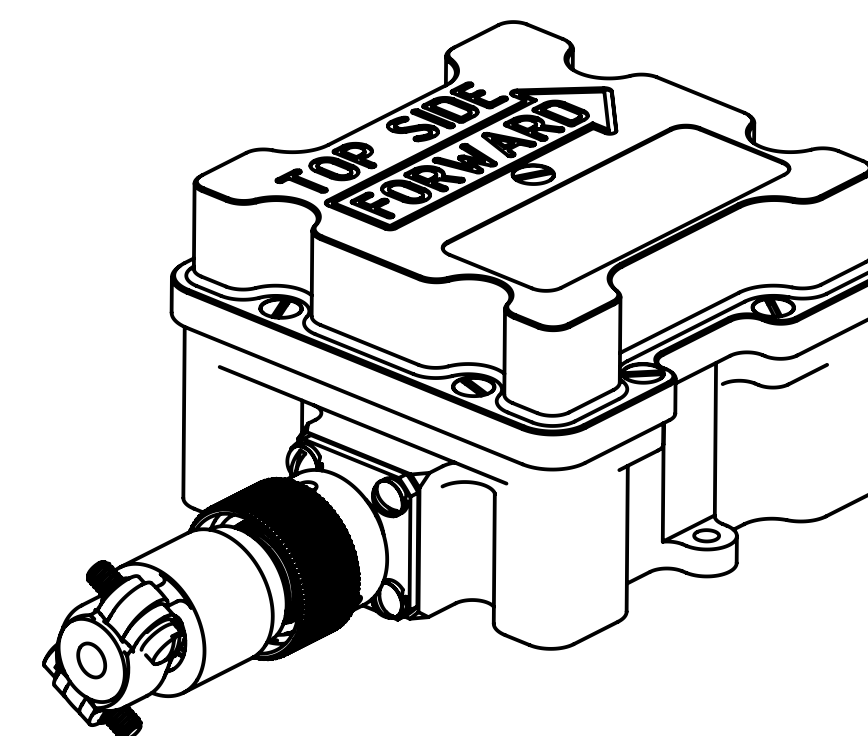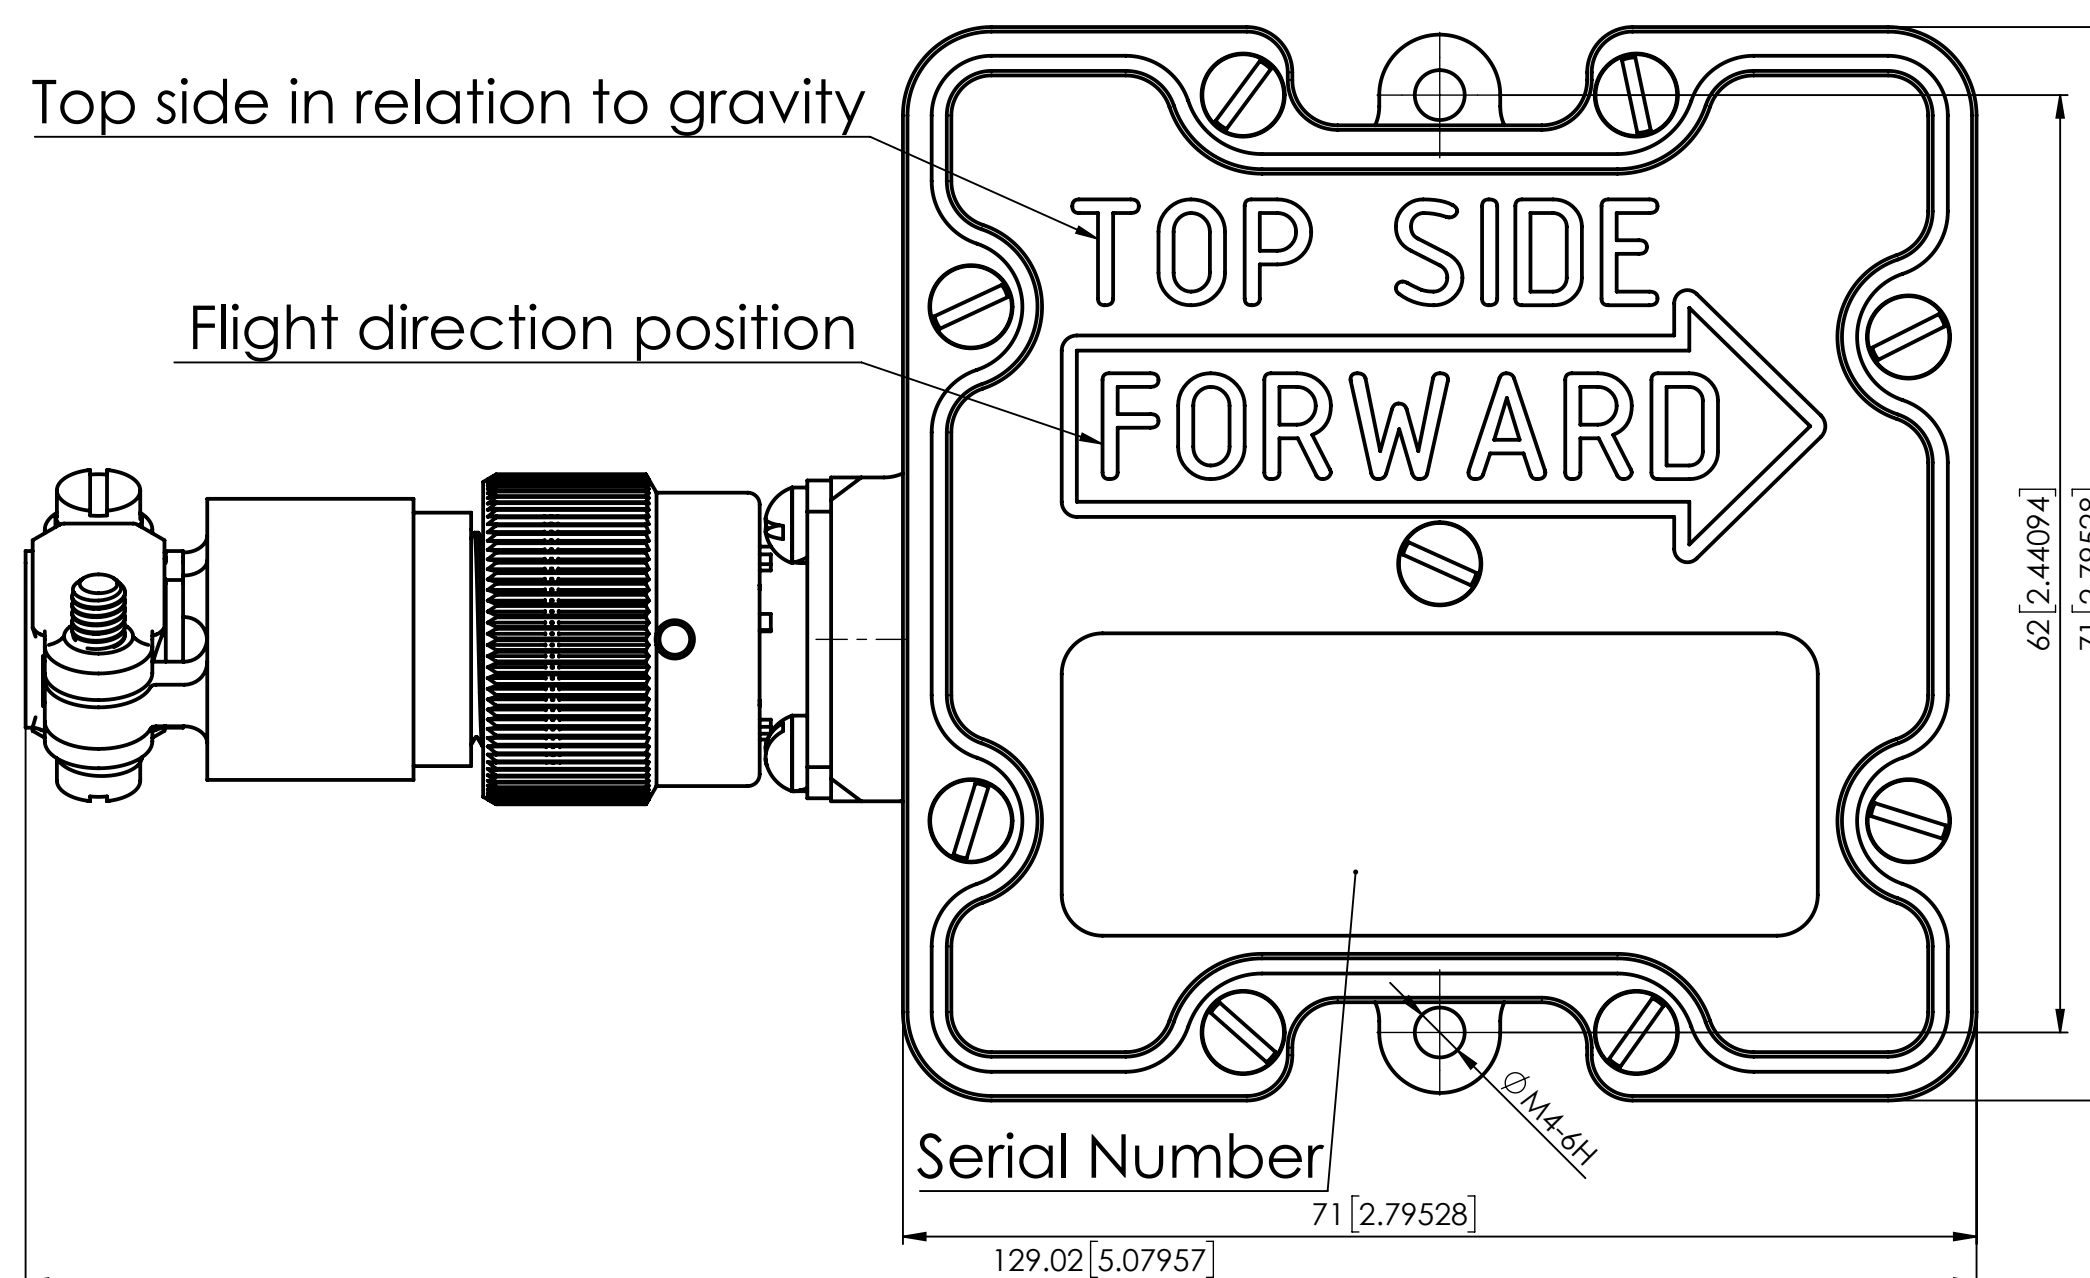

Technical information:

1. Protection rating: IP67;
2. Operating temperature: from -40 to +60°C;
3. Power supply: from 5 to 27VDC;
4. Power consumption max: 0.65W/6VDC;

This drawing and any information or descriptive material set out on it are the confidential and copyright property of **UAVOS** © and MUST NOT BE DISCLOSED, COPIED, LOANED in whole or part or used for any purpose without the written permission of **UAVOS**


NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
DIM ARE IN MILLIMETERS
[DIM ARE IN INCHES]
TOL ON ANGLES $\pm 0.5^\circ$
0 PLACE ± 0.5 1 PLACE ± 0.1
INTERPRET DIM AND TOL
PER **ASME Y14.5M**
Surface Finish: **Ra3.2**

THIRD ANGLE PROJECTION



DRAFTER		
CHECKER		
DEV ENGR		
CONTRACT NO.		
UAVOS FUNDED		
MATERIAL		



UAVOS

Central Processing Unit

SIZE A2	CAGE CODE	DRAWING NUMBER UV01.431329.102.330.00	REV 10
SCALE 2:1	WEIGHT KG 0.151	SHEET 1 OF 1	

SIZE A2	CAGE CODE	DRAWING NUMBER UV01.431329.102.330.00	REV 10
SCALE 2:1	WEIGHT KG 0.151	SHEET 1 OF 1	